


Hex head flange screws / bolts partially / fully threaded



DIN-6921

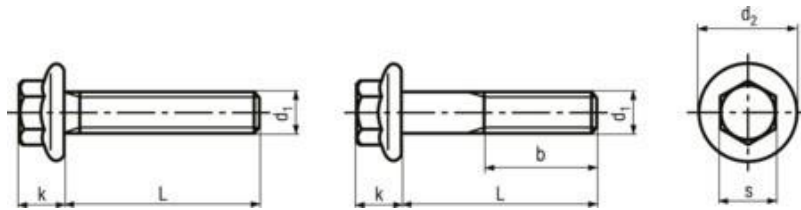

Headform

Hexagonal with flange

Drive

Hexagon

Thread

partially / fully threaded

Material

Steel

Strength class

As per requirement

Surface

As per requirement


Standard

DIN-6921

M10; M12; M16: wrench size according to EN on request

Article no.	d1	L	d2 max.	k max.	s	b
3406010	M6	10	14,2	6,6	10	-
3406012	M6	12	14,2	6,6	10	-
3406016	M6	16	14,2	6,6	10	-
3406020	M6	20	14,2	6,6	10	-
3406025	M6	25	14,2	6,6	10	18
3406030	M6	30	14,2	6,6	10	18
3408016	M8	16	18	8,1	13	-
3408020	M8	20	18	8,1	13	-
3408025	M8	25	18	8,1	13	-
3408030	M8	30	18	8,1	13	-
3408035	M8	35	18	8,1	13	22
3408040	M8	40	18	8,1	13	22
3408050	M8	50	18	8,1	13	22
3410016	M10	16	22,3	9,2	15	-

Article no.	d1	L	d2 max.	k max.	s	b
3410020	M10	20	22,3	9,2	15	-
3410025	M10	25	22,3	9,2	15	-
3410030	M10	30	22,3	9,2	15	-
3410035	M10	35	22,3	9,2	15	-
3410040	M10	40	22,3	9,2	15	26
3410050	M10	50	22,3	9,2	15	26
3412020	M12	20	26,6	11,5	16	-
3412025	M12	25	26,6	11,5	16	-
3412030	M12	30	26,6	11,5	16	-
3412035	M12	35	26,6	11,5	16	-
3412040	M12	40	26,6	11,5	16	-
3412050	M12	50	26,6	11,5	16	30
3412080	M12	80	26,6	11,5	16	30
3416040	M16	40	35	14,4	21	-
3416070	M16	70	35	14,4	21	38

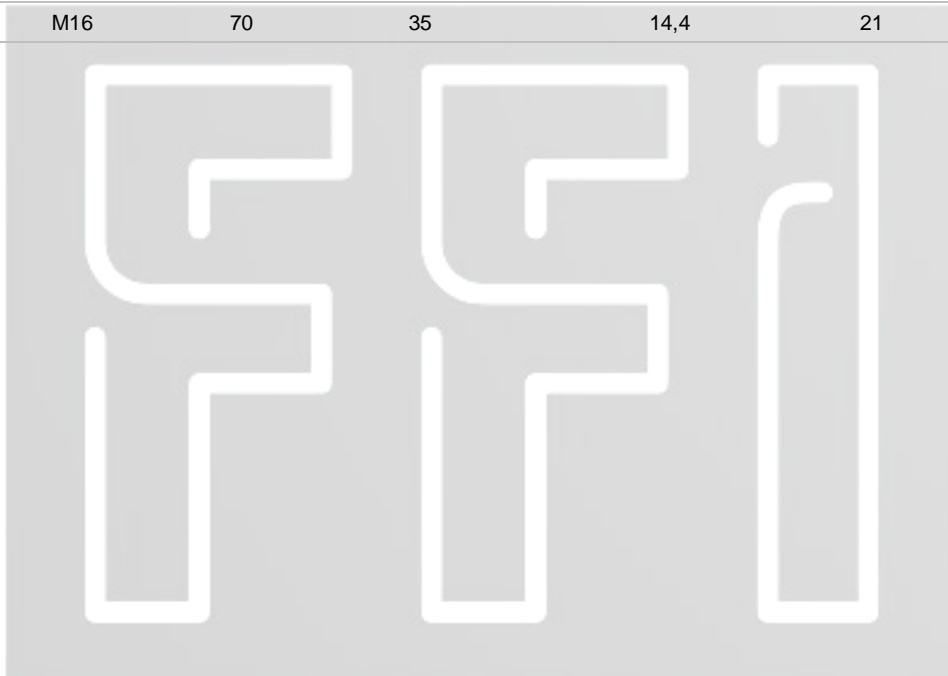

FORGE FIT INDIA