


# Hex head tapping screws with cone end type C

DIN-7976

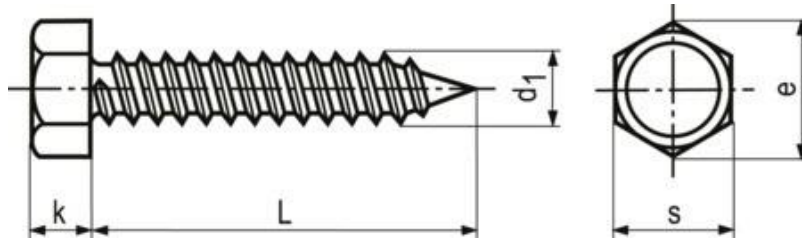

Headform

Hexagon

Drive

Hexagon

Thread

fully threaded

Material

Steel

Material execution

case-hardened

Surface

As per Requirements

Hardness

As Per Requirements

Standard

DIN 7976 C (Standard withdrawn), ~ISO 1479, ~UNI 6949 AB

Warnings

ISO 4042

Quenched and tempered fasteners

≥ 360 HV and tempered case-hardened fasteners with electroplated coatings:

Susceptible to hydrogen embrittlement!

Further notice to residual risks can be found in the introduction section.

Article no.	d1	L	k	e min.	s
693506X	ST 3,5	6,5	2,3	5,96	5,5
693509X	ST 3,5	9,5	2,3	5,96	5,5
6935013	ST 3,5	13	2,3	5,96	5,5
6935016	ST 3,5	16	2,3	5,96	5,5
6935019	ST 3,5	19	2,3	5,96	5,5
694209X	ST 4,2	9,5	2,8	7,59	7
6942013	ST 4,2	13	2,8	7,59	7
6942016	ST 4,2	16	2,8	7,59	7
6942019	ST 4,2	19	2,8	7,59	7

Article no.	d1	L	k	e min.	s
6942025	ST 4,2	25	2,8	7,59	7
6942032	ST 4,2	32	2,8	7,59	7
694809X	ST 4,8	9,5	3	8,71	8
6948013	ST 4,8	13	3	8,71	8
6948016	ST 4,8	16	3	8,71	8
6948019	ST 4,8	19	3	8,71	8
6948022	ST 4,8	22	3	8,71	8
6948025	ST 4,8	25	3	8,71	8
6948032	ST 4,8	32	3	8,71	8
6948038	ST 4,8	38	3	8,71	8
6948045	ST 4,8	45	3	8,71	8
6955013	(ST 5,5)	13	4	8,71	8
6955016	(ST 5,5)	16	4	8,71	8
6955019	(ST 5,5)	19	4	8,71	8
6955022	(ST 5,5)	22	4	8,71	8
6955025	(ST 5,5)	25	4	8,71	8
6955032	(ST 5,5)	32	4	8,71	8
6955038	(ST 5,5)	38	4	8,71	8
6955045	(ST 5,5)	45	4	8,71	8
6955050	(ST 5,5)	50	4	8,71	8
6963013	ST 6,3	13	4,8	10,95	10
6963016	ST 6,3	16	4,8	10,95	10
6963019	ST 6,3	19	4,8	10,95	10
6963022	ST 6,3	22	4,8	10,95	10
6963025	ST 6,3	25	4,8	10,95	10
6963032	ST 6,3	32	4,8	10,95	10
6963038	ST 6,3	38	4,8	10,95	10
6963045	ST 6,3	45	4,8	10,95	10
6963050	ST 6,3	50	4,8	10,95	10

FORGE FIT INDIA