


Hex socket set screws with cup point

ISO-4029, DIN-916

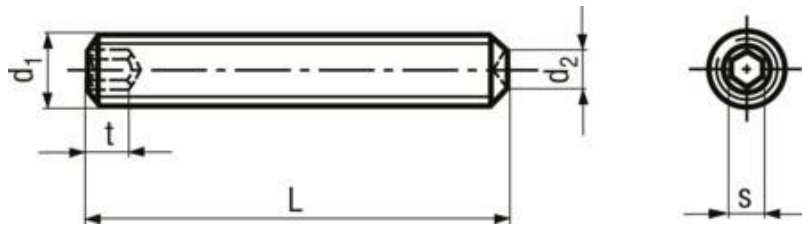

Drive

Hexagon socket

Material

Steel

Surface

zinc plated blue

Hardness

45 H

Standard

ISO 4029, DIN 916, ~UNI 5929

Warnings

ISO 4042
 Quenched and tempered fasteners
 ≥ 360 HV and tempered case-hardened fasteners with electroplated coatings:
 Susceptible to hydrogen embrittlement!
 Further notice to residual risks can be found in the introduction section.
 Set screws are not intended to be tensile-loaded.

Article no.	d1	L	d2	s	t min.
4203003	M3	3	1,15-1,4	1,5	1,2
4203004	M3	4	1,15-1,4	1,5	1,2
4203005	M3	5	1,15-1,4	1,5	2
4203006	M3	6	1,15-1,4	1,5	2
4203008	M3	8	1,15-1,4	1,5	2
4203010	M3	10	1,15-1,4	1,5	2
4204004	M4	4	1,75-2	2	1,5
4204005	M4	5	1,75-2	2	1,5
4204006	M4	6	1,75-2	2	2,5
4204008	M4	8	1,75-2	2	2,5
4204010	M4	10	1,75-2	2	2,5
4204012	M4	12	1,75-2	2	2,5
4205005	M5	5	2,25-2,5	2,5	2
4205006	M5	6	2,25-2,5	2,5	3

Article no.	d1	L	d2	s	t min.
4205008	M5	8	2,25-2,5	2,5	3
4205010	M5	10	2,25-2,5	2,5	3
4205012	M5	12	2,25-2,5	2,5	3
4205016	M5	16	2,25-2,5	2,5	3
4206006	M6	6	2,75-3	3	2
4206008	M6	8	2,75-3	3	3,5
4206010	M6	10	2,75-3	3	3,5
4206012	M6	12	2,75-3	3	3,5
4206016	M6	16	2,75-3	3	3,5
4206020	M6	20	2,75-3	3	3,5
4206025	M6	25	2,75-3	3	3,5



FORGE FIT INDIA