


# Hex socket set screws with flat point

BN 28

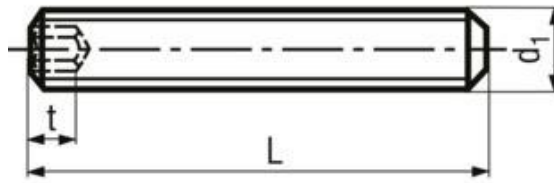

Drive	Hexagon socket
Material	Steel
Surface	zinc plated blue
Hardness	45 H
Standard	ISO 4026, DIN 913, ~UNI 5923, ~ČSN 021187
Warnings	<p>ISO 4042            Quenched and tempered fasteners            ≥ 360 HV and tempered case-hardened fasteners with electroplated coatings:            Susceptible to hydrogen embrittlement!            Further notice to residual risks can be found in the introduction section.</p> <p>Set screws are not intended to be tensile-loaded.</p>

Article no.	d1	L	s	t min.
3903003	M3	3	1,5	1,2
3903004	M3	4	1,5	2
3903005	M3	5	1,5	2
3903006	M3	6	1,5	2
3903008	M3	8	1,5	2
3903010	M3	10	1,5	2
3903012	M3	12	1,5	2
3903014	M3	14	1,5	2
3903016	M3	16	1,5	2
3903020	M3	20	1,5	2
3903025	M3	25	1,5	2
3904004	M4	4	2	1,5
3904005	M4	5	2	2,5
3904006	M4	6	2	2,5

Article no.	d1	L	s	t min.
3904008	M4	8	2	2,5
3904010	M4	10	2	2,5
3904012	M4	12	2	2,5
3904014	M4	14	2	2,5
3904016	M4	16	2	2,5
3904018	M4	18	2	2,5
3904020	M4	20	2	2,5
3904022	M4	22	2	2,5
3904025	M4	25	2	2,5
3904030	M4	30	2	2,5
3905005	M5	5	2,5	2
3905006	M5	6	2,5	3
3905008	M5	8	2,5	3
3905010	M5	10	2,5	3
3905012	M5	12	2,5	3
3905014	M5	14	2,5	3
3905016	M5	16	2,5	3
3905020	M5	20	2,5	3
3905025	M5	25	2,5	3
3905030	M5	30	2,5	3
3905035	M5	35	2,5	3
3905040	M5	40	2,5	3
3905050	M5	50	2,5	3
3906005	M6	5	3	2
3906006	M6	6	3	2
3906008	M6	8	3	3,5
3906010	M6	10	3	3,5
3906012	M6	12	3	3,5
3906014	M6	14	3	3,5
3906016	M6	16	3	3,5
3906020	M6	20	3	3,5
3906025	M6	25	3	3,5
3906030	M6	30	3	3,5
3906035	M6	35	3	3,5
3906040	M6	40	3	3,5
3906045	M6	45	3	3,5
3906050	M6	50	3	3,5
3906060	M6	60	3	3,5