


# Pozi pan head tapping screws with collar, form Z and cone end type C

DIN-968

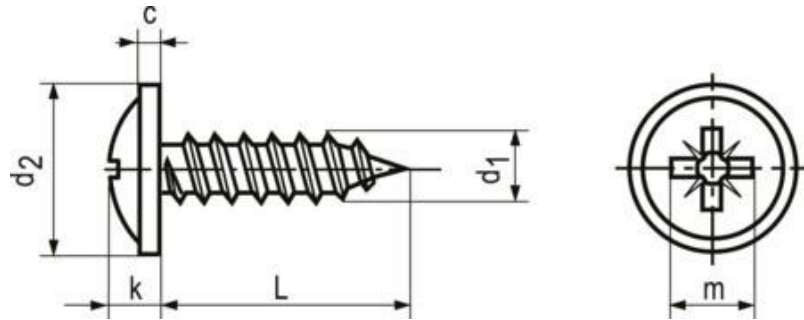

Headform

Button with collar

Drive

Cross recess Z (Pozidriv)

Thread

fully threaded

Material

Steel

Material execution

case-hardened

Surface

As per Requirements

Hardness

As per Requirements

Standard

DIN-968

Warnings

ISO 4042

Quenched and tempered fasteners

≥ 360 HV and tempered case-hardened fasteners with electroplated coatings:

Susceptible to hydrogen embrittlement!

Further notice to residual risks can be found in the introduction section.

FORGE FIT INDIA

Article no.	d1	L	d2 max.	k max.	c max.	Pozidriv	m~
682906X	ST 2,9	6,5	7,5	2,35	0,8	1	2,9
682909X	ST 2,9	9,5	7,5	2,35	0,8	1	2,9
6829013	ST 2,9	13	7,5	2,35	0,8	1	2,9
6829016	ST 2,9	16	7,5	2,35	0,8	1	2,9
683506X	ST 3,5	6,5	9	2,6	0,9	2	3,9
683509X	ST 3,5	9,5	9	2,6	0,9	2	3,9
6835013	ST 3,5	13	9	2,6	0,9	2	3,9
6835016	ST 3,5	16	9	2,6	0,9	2	3,9
6835019	ST 3,5	19	9	2,6	0,9	2	3,9

Article no.	d1	L	d2 max.	k max.	c max.	Pozidriv	m~
684209X	ST 4,2	9,5	10	3,05	1,1	2	4,3
6842013	ST 4,2	13	10	3,05	1,1	2	4,3
6842016	ST 4,2	16	10	3,05	1,1	2	4,3
6842019	ST 4,2	19	10	3,05	1,1	2	4,3
684809X	ST 4,8	9,5	11,5	3,55	1,35	2	4,7
6848013	ST 4,8	13	11,5	3,55	1,35	2	4,7
6848016	ST 4,8	16	11,5	3,55	1,35	2	4,7
6848019	ST 4,8	19	11,5	3,55	1,35	2	4,7



FORGE FIT INDIA