



# Slotted hex head screws fully threaded

DIN-933 Sz, ISO-4017

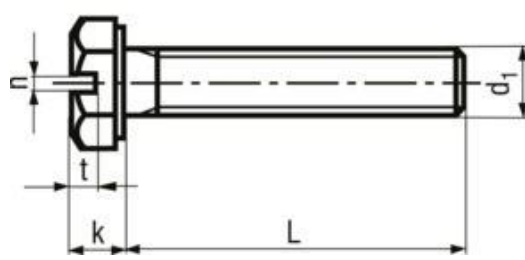

Headform

Hexagon

Drive

Hexagon with slot

Thread

fully threaded

Material

Steel

Strength class

As per requirement

Surface

As per requirement

Standard

DIN-933 Sz, ISO-4017

n min., t min.: slot according DIN 962

Article no.	d1	L	e	k	s	n min.	t min.
3304006	M4	6	7,66	2,8	7	1,06	1,12
3304008	M4	8	7,66	2,8	7	1,06	1,12
3304010	M4	10	7,66	2,8	7	1,06	1,12
3304012	M4	12	7,66	2,8	7	1,06	1,12
3304016	M4	16	7,66	2,8	7	1,06	1,12
3304020	M4	20	7,66	2,8	7	1,06	1,12
3304025	M4	25	7,66	2,8	7	1,06	1,12
3305008	M5	8	8,79	3,5	8	1,26	1,4
3305010	M5	10	8,79	3,5	8	1,26	1,4
3305012	M5	12	8,79	3,5	8	1,26	1,4
3305016	M5	16	8,79	3,5	8	1,26	1,4
3305020	M5	20	8,79	3,5	8	1,26	1,4
3305025	M5	25	8,79	3,5	8	1,26	1,4
3306008	M6	8	11,05	4	10	1,66	1,6

Article no.	d1	L	e	k	s	n min.	t min.
3306010	M6	10	11,05	4	10	1,66	1,6
3306012	M6	12	11,05	4	10	1,66	1,6
3306016	M6	16	11,05	4	10	1,66	1,6
3306020	M6	20	11,05	4	10	1,66	1,6
3306025	M6	25	11,05	4	10	1,66	1,6
3306030	M6	30	11,05	4	10	1,66	1,6
3306035	M6	35	11,05	4	10	1,66	1,6
3306040	M6	40	11,05	4	10	1,66	1,6
3308012	M8	12	14,38	5,3	13	2,06	2,12
3308016	M8	16	14,38	5,3	13	2,06	2,12
3308020	M8	20	14,38	5,3	13	2,06	2,12
3308025	M8	25	14,38	5,3	13	2,06	2,12
3308030	M8	30	14,38	5,3	13	2,06	2,12
3308040	M8	40	14,38	5,3	13	2,06	2,12



FORGE FIT INDIA