


# Slotted oval countersunk head tapping screws with cone end type C

DIN-7973

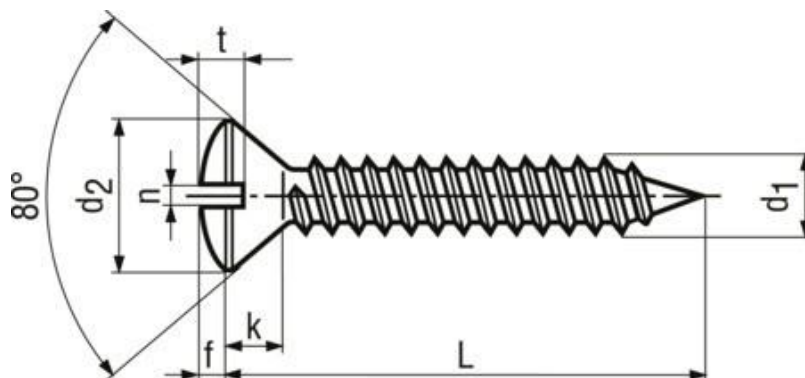

Headform

Oval countersunk

Drive

Slot

Thread

fully threaded

Material

Steel

Material execution

case-hardened

Surface

As per Requirements

Hardness

As per Requirements

Standard

DIN-7973

Warnings

ISO 4042

Quenched and tempered fasteners

≥ 360 HV and tempered case-hardened fasteners with electroplated coatings:

Susceptible to hydrogen embrittlement!

Further notice to residual risks can be found in the introduction section.

Article no.	d1	L	d2 max.	f~	k~	n	t min.
642906X	ST 2,9	6,5	5,5	0,9	1,7	0,8	1,25
642909X	ST 2,9	9,5	5,5	0,9	1,7	0,8	1,25
6429013	ST 2,9	13	5,5	0,9	1,7	0,8	1,25
6429016	ST 2,9	16	5,5	0,9	1,7	0,8	1,25
6429019	ST 2,9	19	5,5	0,9	1,7	0,8	1,25
6429025	ST 2,9	25	5,5	0,9	1,7	0,8	1,25
6435013	ST 3,5	13	6,8	1,2	2,1	1	1,55
6435016	ST 3,5	16	6,8	1,2	2,1	1	1,55
6435016	ST 3,5	19	6,8	1,2	2,1	1	1,55

Article no.	d1	L	d2 max.	f~	k~	n	t min.
6439013	(ST 3,9)	13	7,5	1,3	2,3	1	1,7
6439016	(ST 3,9)	16	7,5	1,3	2,3	1	1,7
6439019	(ST 3,9)	19	7,5	1,3	2,3	1	1,7
6442013	ST 4,2	13	8,1	1,4	2,5	1,2	1,85
6442016	ST 4,2	16	8,1	1,4	2,5	1,2	1,85
6442019	ST 4,2	19	8,1	1,4	2,5	1,2	1,85
6442025	ST 4,2	25	8,1	1,4	2,5	1,2	1,85



FORGE FIT INDIA